


### J-Dust-Ring specification and dimension

Working pressure: <35 Mpa  
 Working speed: <0.5 m/s  
 Operating temperature: -20 ~150 ~C  
 Medium: Hydraulic oil  
 Material properties  
 Material: Polyurethane PU L-93  
 Hardness: Shaw A90 [2]

### Specification And Dimension

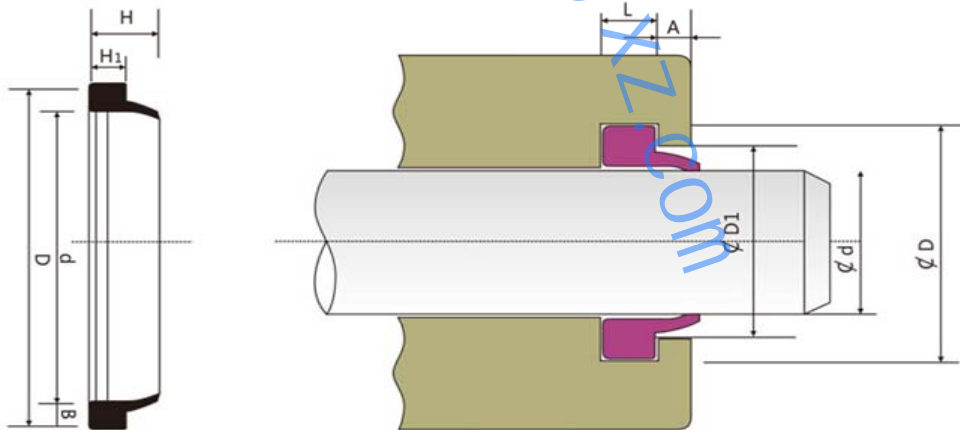

name	d	D	H	H1	d	D	DI	L	A>
J14	14	22.5	7	4	14	22.5	19	4	3
J16	16	24.5	7	4	16	24.5	21	4	3
J18	18	28.5	9	5	18	28.5	23	5	3
J20	20	30.5	9	5	20	30.5	25	5	3
J22	22	32.5	9	5	22	32.5	27	5	3
J25	25	35.5	9	5	25	35.5	30	5	3
J28	28	38.5	9	5	28	38.5	33	5	3
J30	30	40.5	10	6	30	40.5	36	6	3
J32	32	42.5	10	6	32	42.5	38	6	3
J35	35	45.5	10	6	35	45.5	41	6	3
J40	40	50.5	10	6	40	50.5	46	6	3
J45	45	55.5	10	6	45	55.5	51	6	3
J50	50	60.5	10	6	50	60.5	56	6	3
J55	55	67.5	11	7	55	67.5	61	7	3.5
J60	60	72.5	11	7	60	72.5	66	7	3.5
J63	63	75.5	11	7	63	75.5	69	7	3.5
J65	65	77.5	11	7	65	77.5	71	7	3.5
J70	70	82.5	11	7	70	82.5	76	7	3.5
J75	75	87.5	11	7	75	87.5	81	7	3.5
J80	80	92.5	11	7	80	92.5	86	7	3.5
J85	85	97.5	11	7	85	97.5	91	7	3.5
J90	90	102.5	11	7	90	102.5	96	7	3.5
J95	95	107.5	11	7	95	107.5	101	7	3.5
J100	100	112.5	11	7	100	112.5	106	7	3.5

J110	110	124.5	12	8	110	124.5	117	8	4
J115	115	129.5	12	8	115	129.5	122	8	4
J120	120	134.5	12	8	120	134.5	127	8	4
J125	125	139.5	12	8	125	139.5	132	8	4
J130	130	144.5	12	8	130	144.5	137	8	4
J135	135	149.6	14	9	135	149.6	142	9	4
J140	140	158.5	14	9	140	158.5	147	9	4
J145	145	163.5	14	9	145	163.5	152	9	4
J150	150	168.5	14	9	150	168.5	157	9	4
J155	155	173.5	14	9	155	173.5	162	9	4
J160	160	178.5	14	9	160	178.5	167	9	4
J165	165	183.5	14	9	165	183.5	172	9	4
J170	170	188.5	14	9	170	188.5	177	9	4
J175	175	193.5	14	9	175	193.5	182	9	4
J180	180	198.5	14	9	180	198.5	187	9	4
J185	185	203.5	14	9	185	203.5	192	9	4
J190	190	208.5	14	9	190	208.5	197	9	4
J195	195	213.5	14	9	195	213.5	202	9	4
J200	200	218.5	14	9	200	218.5	207	9	4
J205	205	223.5	14	9	205	223.5	212	9	4
J210	210	228.5	14	9	210	228.5	217	9	4
J215	215	233.5	14	9	215	233.5	222	9	4
J220	220	238.5	14	9	220	238.5	227	9	4
J230	230	248.5	14	9	230	248.5	237	9	4
J235	235	253.5	14	9	235	253.5	242	9	4
J240	240	258.5	14	9	240	258.5	247	9	4
J245	245	263.5	14	9	245	263.5	252	9	4
J250	250	268.5	14	9	250	268.5	257	9	4
J255	255	273.5	14	9	255	273.5	262	9	4
J260	260	278.5	14	9	260	278.5	267	9	4
J265	265	283.5	14	9	265	283.5	272	9	4
J270	270	288.5	14	9	270	288.5	277	9	4
J275	275	293.5	14	9	275	293.5	282	9	4
J280	280	298.5	14	9	280	298.5	287	9	4
J285	285	303.5	14	9	285	303.5	292	9	4
J290	290	308.5	14	9	290	308.5	297	9	4
J295	295	313.5	14	9	295	313.5	302	9	4
J300	300	318.5	14	9	300	318.5	307	9	4
J310	310	328.5	14	9	310	328.5	317	9	4
J320	320	338.5	14	9	320	338.5	327	9	4
J330	330	348.5	14	9	330	348.5	337	9	4
J340	340	358.5	14	9	340	358.5	347	9	4
J360	360	378.5	14	9	360	378.5	367	9	4
J370	370	388.5	14	9	370	388.5	377	9	4
J380	380	398.5	14	9	380	398.5	387	9	4
J390	390	408.5	14	9	390	408.5	397	9	4
J400	400	418.5	14	9	400	418.5	407	9	4
J420	420	438.5	14	9	420	438.5	427	9	4
J450	450	468.5	14	9	450	468.5	457	9	4